

PUREAIR II

your constant workforce for compressed air



OIL-LESS AIR COMPRESSORS



Long lasting cast iron, hard chrome-plated cylinders. PTFE guide rings prevent the pistons from contact, raising efficiency. Sealed anti-friction bearings in the upper and lower connecting rod ends for increased life.



Strong ductile iron crankshafts are mounted with sealed anti-friction bearings in a rugged cast iron crankcase.



Cast iron heads and spring-loaded valves with stainless steel cages, phosphoric bronze seats and Swedish steel discs keep your compressor running cool and offer a longer operating life.



Large aluminum cooling fan and low compressor speeds keep the PureAir II crankcase, cylinders and heads running cool, reducing wear and increasing the life of the unit.

Oil-less is better.

Whether it's healthcare, instrumentation, or laboratory applications, the need for pure, environmentally clean compressed air is rapidly expanding.

The only compressor you'll need.

Gardner Denver's PureAir II is changing the way the world uses oil-free compressed air. By developing a compressor that can run 24 hours a day, Gardner Denver has eliminated the need for oversizing and back-up units that add unnecessary expense.

Expect the most from the oil-less leader.

The craftsmanship of the PureAir II is nothing short of the best in the industry. Using the finest materials, and design techniques, Gardner Denver now offers a smaller version of the 24-hour a day oil-less compressor that will deliver the clean air you need.

All PureAir II compressors are 100% duty cycle, V-belt-driven packaged units with:

- Inlet Air Filter Silencers
- Enclosed Belt Guards
- Electric Motor
- Discharge Line Unloader Solenoid Valves
- Pressure Relief Valves
- Automatic Start-Stop Controls
- Check Valves
- Interconnecting Wiring and Piping
- Structural Steel Frames

Tank-mounted models include horizontal air receivers that are ASME coded

TYPICAL PERFORMANCE FOR A PUREAIR II

Pump	Motor HP	Air Delivery CFM @ 100 PSIG	Compressor Speed - RPM
CCE20	1	2.9	360
CCE20	1 1/2	4.5	570
CCE20	2	6.3	680
CCE30	3	9.4	650
CVE50	5	15.6	650

MAINTENANCE. Keeping the PureAir II up and running is as simple as checking the machine periodically. And, with no oil or fluids to change, there's little need for costly maintenance.


DURABILITY. With the highest reliability in the business, you can be assured that your PureAir II will always be up and running, 24 hours a day.

SERVICE. Should you need help with your PureAir II or have any questions about operation or maintenance, your Gardner Denver Service Representative stands ready to serve you.

WARRANTY. All PureAir II units are guaranteed with a one-year warranty on the compressor pump and all other parts and components.

PARTS. The 24-hour Gardner Denver worldwide parts distribution network can deliver parts and accessories quickly, wherever and whenever they are needed.

EXPANDABILITY. Whether you just need a compressor or a complete compressed air system, Gardner Denver has the products, service and expertise to get your system designed, fabricated and shipped directly to you.

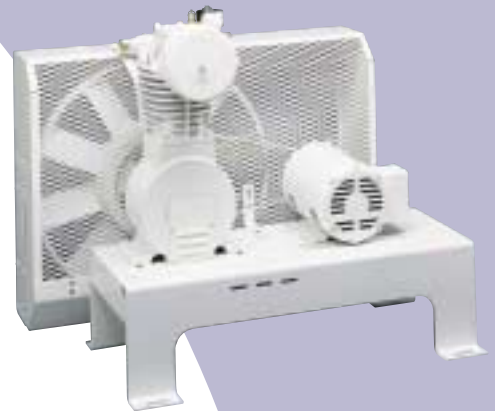

SPECIFICATIONS

BASE MOUNTED



Unit Model	HP	Pump	Pump RPM	CFM Delivery*		Bore Dia in	Stroke IN	Dimensions L x W x H in	WT lbs
				50 psig	100 psig				
B1MTOII	1	CCE20	360	4.1	2.9	3.94	2.36	36 x 22 x 30	190
B1.5MTOII	1.5	CCE20	570	6.8	4.5	3.94	2.36	36 x 22 x 30	196
B2MTOII	2	CCE20	680	8.2	6.3	3.94	2.36	36 x 22 x 30	201
B3MTOII	3	CCE30	650	11.2	9.4	4.72	2.56	36 x 22 x 30	264
B5MTOII	5	CVE50	650	18.2	15.6	3.94	2.95	36 x 24 x 28	318

SIMPLEX TANK-MOUNTED



Unit Model	HP	Pump	Pump RPM	CFM Delivery*		Bore Dia in	Stroke IN	Dimensions L x W x H in	WT lbs
				50 psig	100 psig				
H1MTOII-3	1	CCE20	360	4.1	2.9	3.94	2.36	38 x 25.5 x 42.5	259
H1MTOII-6	1	CCE20	360	4.1	2.9	3.94	2.36	48 x 25.5 x 47.5	379
H1.5MTOII-3	1.5	CCE20	570	6.8	4.5	3.94	2.36	38 x 25.5 x 42.5	265
H1.5MTOII-6	1.5	CCE20	570	6.8	4.5	3.94	2.36	48 x 25.5 x 47.5	385
H2MTOII-3	2	CCE20	680	8.2	6.3	3.94	2.36	38 x 25.5 x 42.5	270
H2MTOII-6	2	CCE20	680	8.2	6.3	3.94	2.36	48 x 25.5 x 47.5	390
H3MTOII-6	3	CCE30	650	11.2	9.4	4.72	2.56	48 x 25.5 x 47.5	453
H5MTOII-6	5	CVE50	650	18.2	15.6	3.94	2.95	48 x 25.5 x 45	507

DUPLEX TANK-MOUNTED



Unit Model	HP	Pump	Pump RPM	CFM Delivery*		Bore Dia in	Stroke IN	Dimensions L x W x H in	WT lbs
				50 psig	100 psig				
H1MTOIID-6	1	CCE20	360	8.2	5.8	3.94	2.36	70 x 29 x 48	575
H1MTOIID-8	1	CCE20	360	8.2	5.8	3.94	2.36	70 x 29 x 48	635
H1.5MTOIID-6	1.5	CCE20	570	13.6	9.0	3.94	2.36	70 x 29 x 48	587
H1.5MTOIID-8	1.5	CCE20	570	13.6	9.0	3.94	2.36	70 x 29 x 48	647
H2MTOIID-6	2	CCE20	680	16.4	12.6	3.94	2.36	70 x 29 x 48	597
H2MTOIID-8	2	CCE20	680	16.4	12.6	3.94	2.36	70 x 29 x 48	657
H3MTOIID-8	3	CCE30	650	22.4	18.8	4.72	2.56	70 x 29 x 48	743
H3MTOIID-12	3	CCE30	650	22.4	18.8	4.72	2.56	73 x 22.5 x 52	821
H5MTOIID-8	5	CVE50	650	36.4	31.2	3.94	2.95	70.5 x 29 x 45	851
H5MTOIID-12	5	CVE50	650	36.4	31.2	3.94	2.95	73 x 30.5 x 49.5	929

Example of how to read model designations:

H5MTOIID-12

Horizontal Receiver ————— 120-Gallon Receiver
 5 Horsepower | Series | Duplex

*Units tested in accordance with CAGI/PNEURO P acceptance test code PN2CPTC2.

NOTE: Add 1.0" in height for Vibration Isolators and add 3.50" in length for Ball Valve on tank

**Gardner
Denver**

©2000 Gardner Denver, Inc.
<http://www.gardnerdenver.com>
 1-3-4-215 2nd Edition 5/00

www.gdrecips.com
mktg@gardnerdenver.com
 Litho in U.S.A.



For additional information contact your local representative or Gardner Denver Compressor and Pump Division, 1800 Gardner Expressway, Quincy, Illinois 62301 Customer Service Department Telephone: (815) 875-3321 FAX: (815) 872-0421 Sales and Service in all major cities. For parts information, contact Gardner Denver, Telephone: (815) 875-3321